


SAINT-GOBAIN PERFORMANCE CERAMICS & REFRACTORIES

# CERAMIC SYSTEMS

FOR KILNS & FURNACES

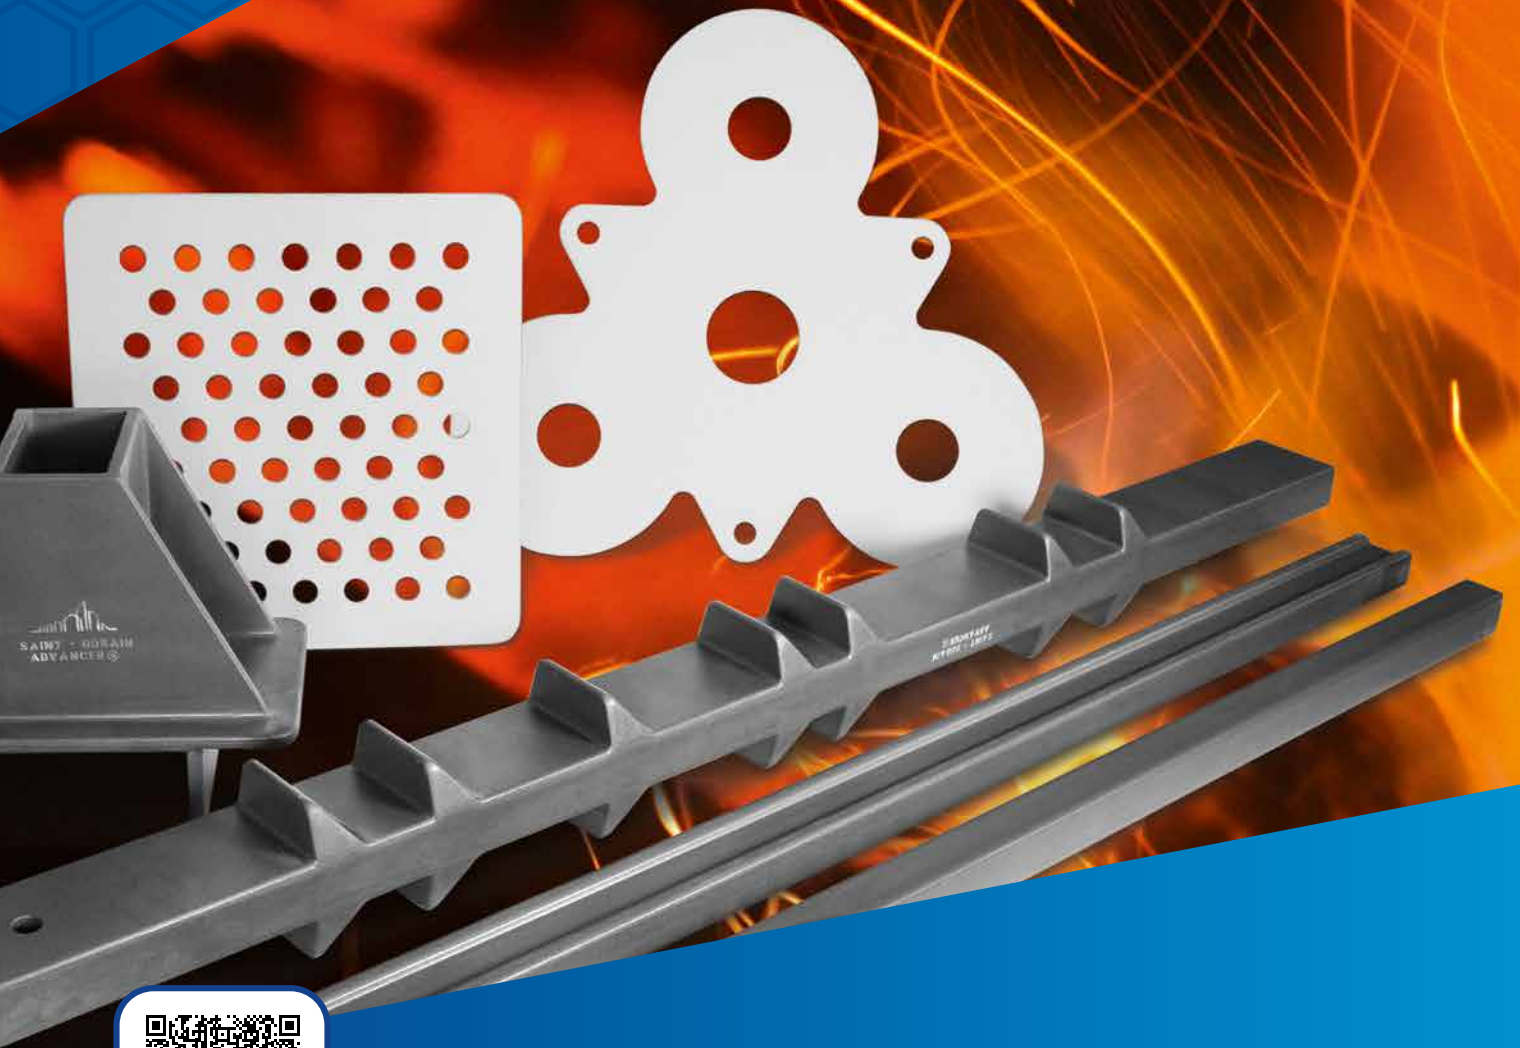

# SAINT-GOBAIN 2023

Derwent  
Top 100  
Global Innovator  
2023

Clarivate  
Analytics

top  
EMPLOYER GLOBAL  
2024



1 IN 4

PRODUCTS  
did not exist 5 years ago



160,000

EMPLOYEES



47.9 BILLION

SALES IN 2023



REPRESENTED IN 76

COUNTRIES



-34%

CARBON EMISSIONS  
REDUCTION  
(vs. 2017 on scope 1+2)



MAIN R&D CENTRES

## OUR PURPOSE

# MAKING THE WORLD A BETTER HOME.

## OUR MISSION

Saint-Gobain designs, manufactures and distributes materials and solutions which are key ingredients in the well-being of each of us and the future of all.

WE ARE COMMITTED TO  
ACHIEVING NET ZERO  
CARBON EMISSIONS BY 2050

## SAINT-GOBAIN

PERFORMANCE CERAMICS & REFRACTORIES

## OUR MISSION

To design, develop and supply solutions and services for extreme operating industrial conditions. Our engineered ceramics and refractory products are manufactured to the highest industrial standards and deliver enhanced performance while minimizing environmental impact.

PIONEERING CERAMIC SOLUTIONS FOR EXTREME INDUSTRIAL APPLICATIONS AND A GREENER WORLD.

# CERAMIC SYSTEMS

The products and solutions for kilns and furnaces under Saint-Gobain Ceramic Systems are designed and developed for many applications to have consistent and long-term performance.

Our products are designed to withstand high temperatures (up to 2,500°C) and severe operating conditions.

Developed and manufactured to suit kilns and furnaces that are typically used in various industry segments.



## SMART DESIGN

In-depth understanding of customer application & processes, science, design engineering / mathematical modeling and R&D

## PERFORMING PRODUCTS

Customized product design, shape & material for every application & industry, manufacturing & quality consistency

## YOUR PARTNER

Worldwide sales & application team, installation supervision services, OEM collaboration, energy & emission assessment

## CUSTOMER SUPPORT

Experienced, dedicated teams work closely with customers, either in person or remotely via the most advanced digital platforms.

## KEY MARKETS & APPLICATIONS



**WHITEWARE**  
Sanitary & Dinnerware Industries



**AUTOMOTIVE**  
Hot stamping, particle filters, spark plugs, oxygen sensors



**TECHNICAL CERAMICS**



**ELECTRONICS & SEMICONDUCTOR**  
Cathode Active Material (CAM for Li-ion) / SOFC / SOEC / MLCC / Anode Material for Li-Battery



**CHEMICAL**  
Powder / Pharmaceuticals / Catalyst Support



**ABRASIVES & GRINDING MEDIA**  
Powder / Abrasive Grains



# SANITARY & DINNERWARE

Our kiln furniture systems are designed and constructed of advanced silicon carbide (SiC) materials. Thinner, lighter and significantly stronger than traditional kiln furniture for meeting improved energy efficiencies in high temperature applications.

- Constructed of advanced silicon carbide
- Improved energy efficiencies
- Minimize mass
- Maximize strength
- Greater kiln capacity
- Reduced firing cycles

## FEATURES



- Reduced energy consumption
- Optimum rate of capacity utilization
- High flexibility
- Excellent product quality
- Very good thermal shock behavior

## LO-MASS® SYSTEMS

CRYSTAR® • HEXOLOY® SA • HEXOLOY® SE • N-DURANCE®  
SILIT® SK • SILIT® SKD

LO-MASS® components are customizable and flexible for whiteware and porcelain tableware firing systems.


Expertise in product design and customization for every type of kiln.

- Energy efficiencies in high temperature applications
- Minimize mass while maximizing strength
- Increased automation compatibility for loading and unloading

UP TO **33%**  
HIGHER  
EFFICIENCY



# THINNER, LIGHTER, STRONGER

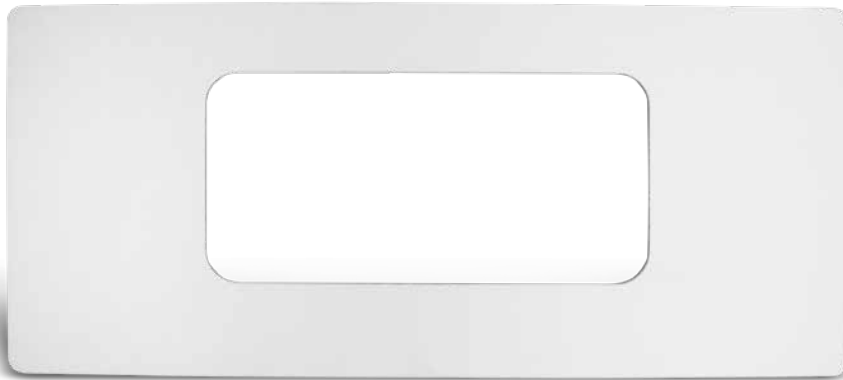

LAVI SETTER

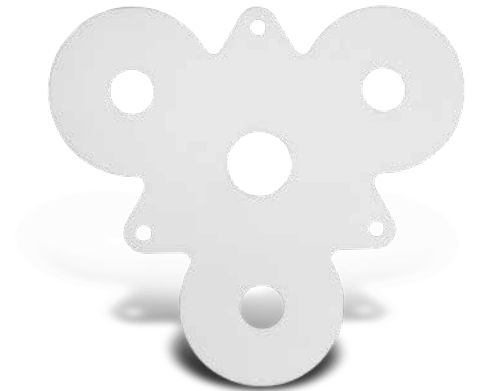


PLATE SETTER TRIO



PROFILE BEAMS & U-PROFILE PLATE


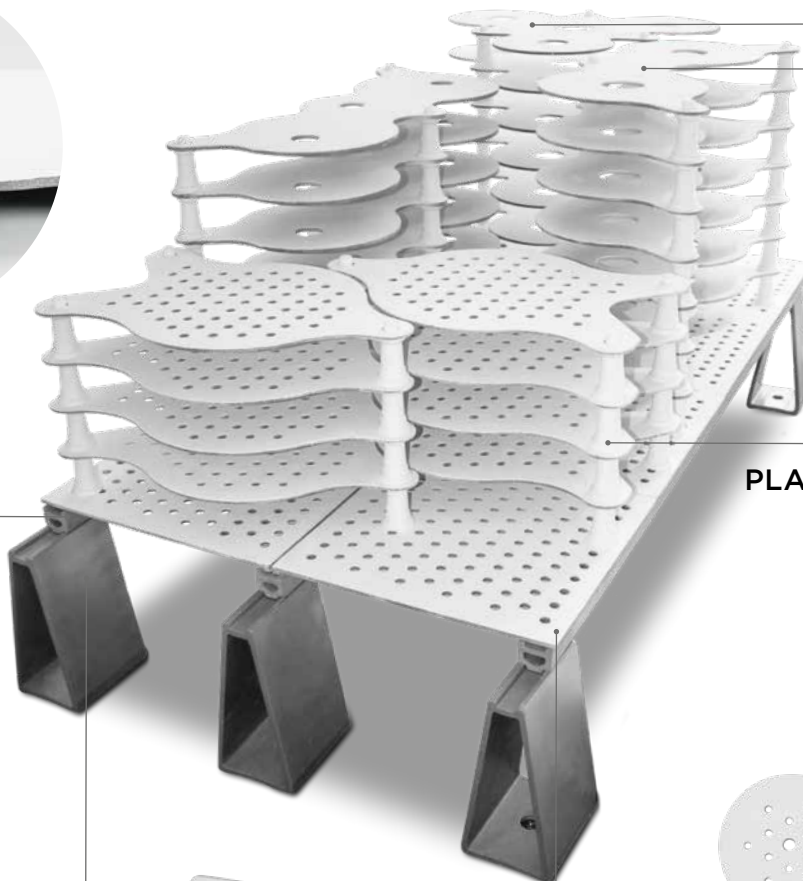



PLATE SETTER DUO



PLATE SETTER SINGLE



SUPPORTS



PLATES


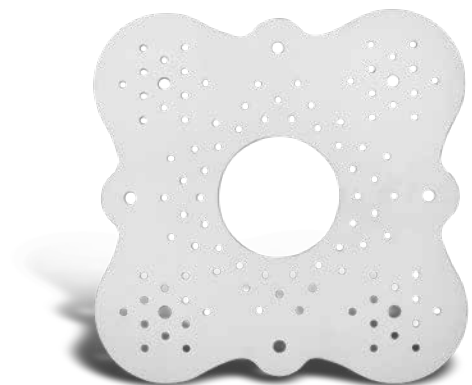


PLATE SETTER QUATTRO




In order to meet the constantly growing challenges of our customers, our innovative XXL plate size guarantees more products and less kiln furniture for your system. We offer this solution in the following key markets:

- Whiteware
- Automotive
- Technical Ceramics
- Abrasives & Grinding Media

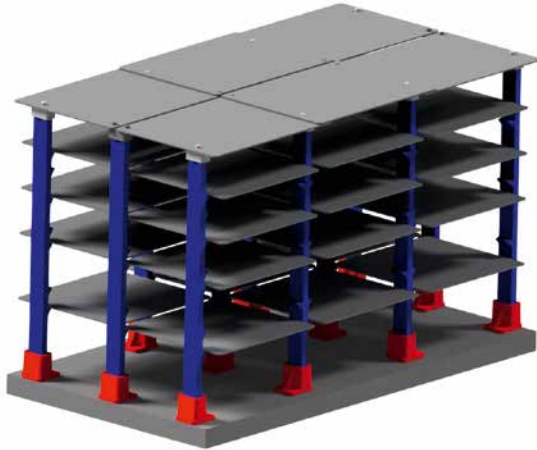

SYSTEM WITH STANDARD PLATES

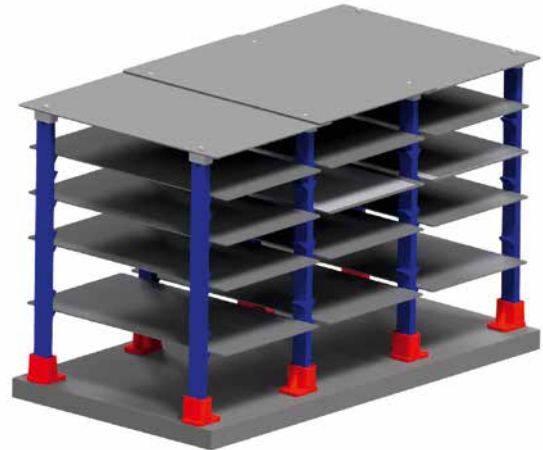

SYSTEM WITH XXL PLATES

## (XXL) PLATES

### N-DURANCE®

Saint-Gobain offers individual designs that are available up to approximately 1250 x 900 x 10 mm (49 x 35 x .974").

They are approximately two times larger than other advanced silicon carbide plates currently offered on the market.

### BENEFITS



Increased setting space




Further reduction of structural supports and kiln furniture



Eliminate joints/seams underneath product



Flatness retention over large setting area

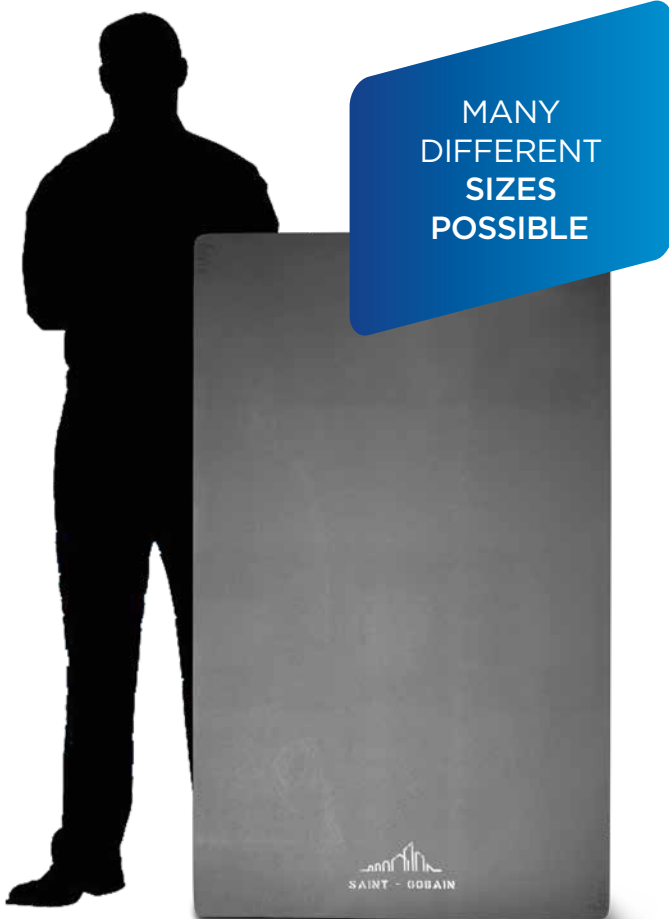




UP TO **40%**  
ENERGY  
SAVINGS

## 3 & 4MM PRODUCTS

### CRYSTAR® • N-DURANCE®

4 mm thick slabs and plate setters are available in a variety of shapes. They are manufactured with our industry proven N-Durance® and Crystar® advanced silicon carbide materials used in

- Porcelain, Dinnerware & Sanitaryware Industries
- Firing ceramic substrates for fuel cells and microelectronics

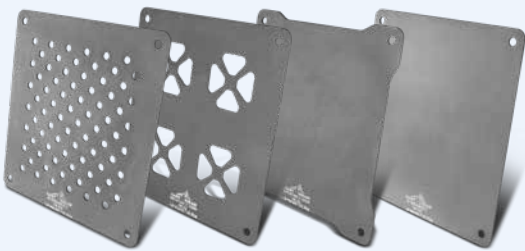

### BENEFITS



Faster heating & cooling cycles (fast firing kiln)



Weight mass reduction



Increased productivity



Reduced CO<sub>2</sub> emissions



Suitable for automated operations

## ≤ 2MM PRODUCTS

### CRYSTAR® • N-DURANCE®

Saint-Gobain's innovative, Lo-Mass® Ultra slab systems are developed for highly flexible kiln furniture rack designs with sizes up to 200 mm x 250 mm and a **thickness down to 2 mm**.

This enables an optimal combination of product design, geometry and overall efficiency that is needed for

- Firing ceramic & composite substrates

### BENEFITS




Energy savings & CO<sub>2</sub> reduction



Increased productivity



Improved life time (up to 1000 cycles)

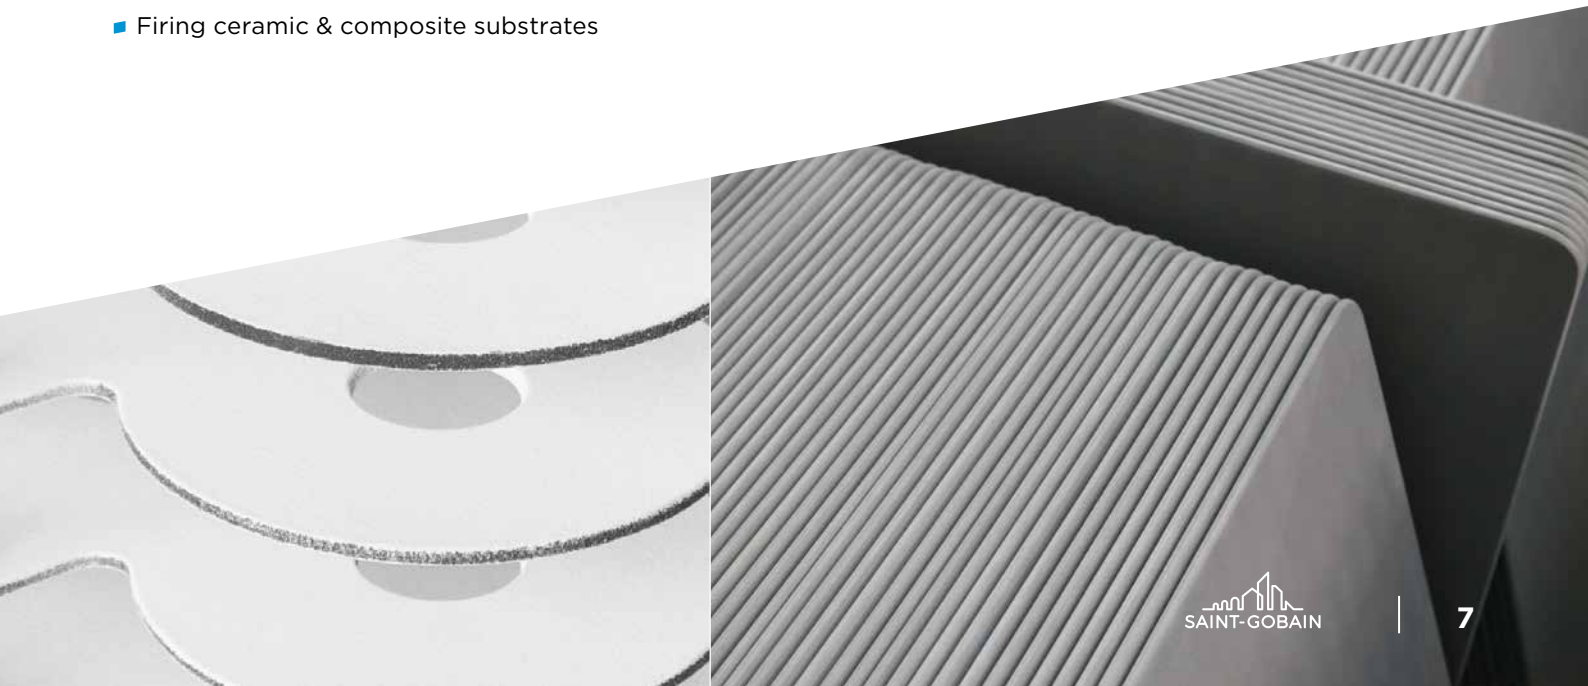





# AUTOMOTIVE

Our most trusted kiln furniture technology delivers increased productivity in manufacturing and processing various automobile components while reducing energy consumption. Our design services are key to optimizing individual requirements.

## FEATURES



Excellent thermal conductivity

Shape stability and strength

Outstanding thermal shock behavior

Defined flatness and surface finish

### ANTI-LOCK BRAKING SYSTEMS

WAFFLE SLABS

### ELECTRONIC STABILITY PROGRAMS

WAFFLE SLABS

### CHASSIS COMPONENTS

HOT STAMPING ROLLERS

### OXYGEN SENSORS

SAGGERS

### SPARK PLUGS

SAGGERS

### DIESEL/GAS PARTICLE FILTERS

KILN FURNITURE ASSEMBLIES

### CATALYTIC CONVERTERS

KILN FURNITURE ASSEMBLIES

### EV BATTERY POWDER

ROLLERS & SAGGERS







# KILN FURNITURE ASSEMBLIES


Our most trusted material technology delivers increased productivity for DPF & GPF, filters and substrate manufacturing while reducing energy consumption.

Customers regularly benefit from our design services producing tailored designs for unique applications.



## POSTS

Silit® SKD • N-Durance®  
Crystar®

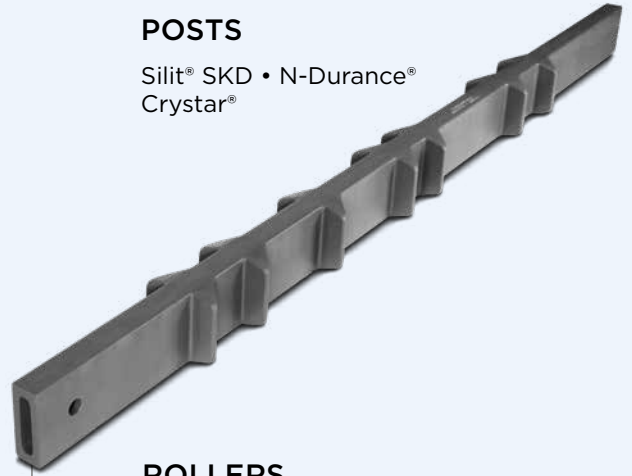

## ROLLERS

Silit® SK • Silit® SKD  
N-Durance® Crystar®  
Hexoloy® SE




## BEAMS & PROFILE BEAMS

Silit® SK • Silit® SKD • N-Durance®  
• Crystar® • Hexoloy® SE



## SUPPORTS

Alundum® • AnnaCarbid® • Cryston®  
AnnaSicon® • Silit® SK • Silit® SKD  
N-Durance® • Crystar® • Hexoloy® SE

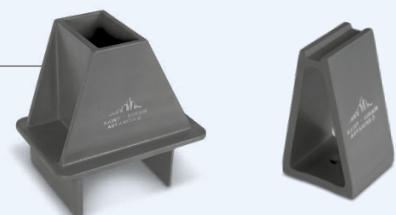

UP TO **40%**  
ENERGY SAVINGS\*

## PLATES

Alundum® • AnnaCarbid® • AnnaMullit® • AnnaSicon® • Cryston®  
Mulnorite® • Mullfrax® • Silit® SK • Silit® SKD • N-Durance® • Crystar®  
Hexoloy® SE

\*Lo-Mass® ULTRA plates on page 5



# CERAMIC ROLLERS FOR HOT STAMPING APPLICATIONS

## DURAFORM®

Our best-in-class ceramic rollers offer distinctive mechanical, thermal, and corrosion resistant characteristics delivering unmatched benefits.

For steel hardening and hot forming processes, our hot stamping rollers are the best solution for your roller hearth kiln challenges. They provide longer life and require less maintenance.

## BENEFITS



Significantly extended lifetime



Improved system reliability



Increased resistance to corrosion



Eased removal of contaminants



Ability to be refurbished at end of life\*

\*available in selected markets



SiC rollers after 12 months -  
Superficial contamination with  
no penetration into the body





## REFRACTORY SHAPES

Our innovative materials offer high temperature stability, thermal shock and corrosion resistance along with other application-tailored properties.



## REFRACTORY BRICK LININGS

**ALUNDUM® • ALFRAX® • AL100  
ANNAMULLIT® • MULLFRAX®  
MULNORITE® • RI34 • ZIRNORITE®**

Our engineered ceramics provide solutions for the production of technical (fine) ceramics in highly specialized and diverse applications. We help our customers to produce technical ceramics with unique mechanical, electrical, thermal and chemical properties and property combinations.

We offer a large selection of silicon carbide, high purity alumina, high alumina-mullite, mullite, zirconia refractory and kiln furniture products.



### BENEFITS



High temperature stability and strength



Excellent thermal shock resistance




Optimum rate of capacity utilization



Chemical compatibility



Superior size capability

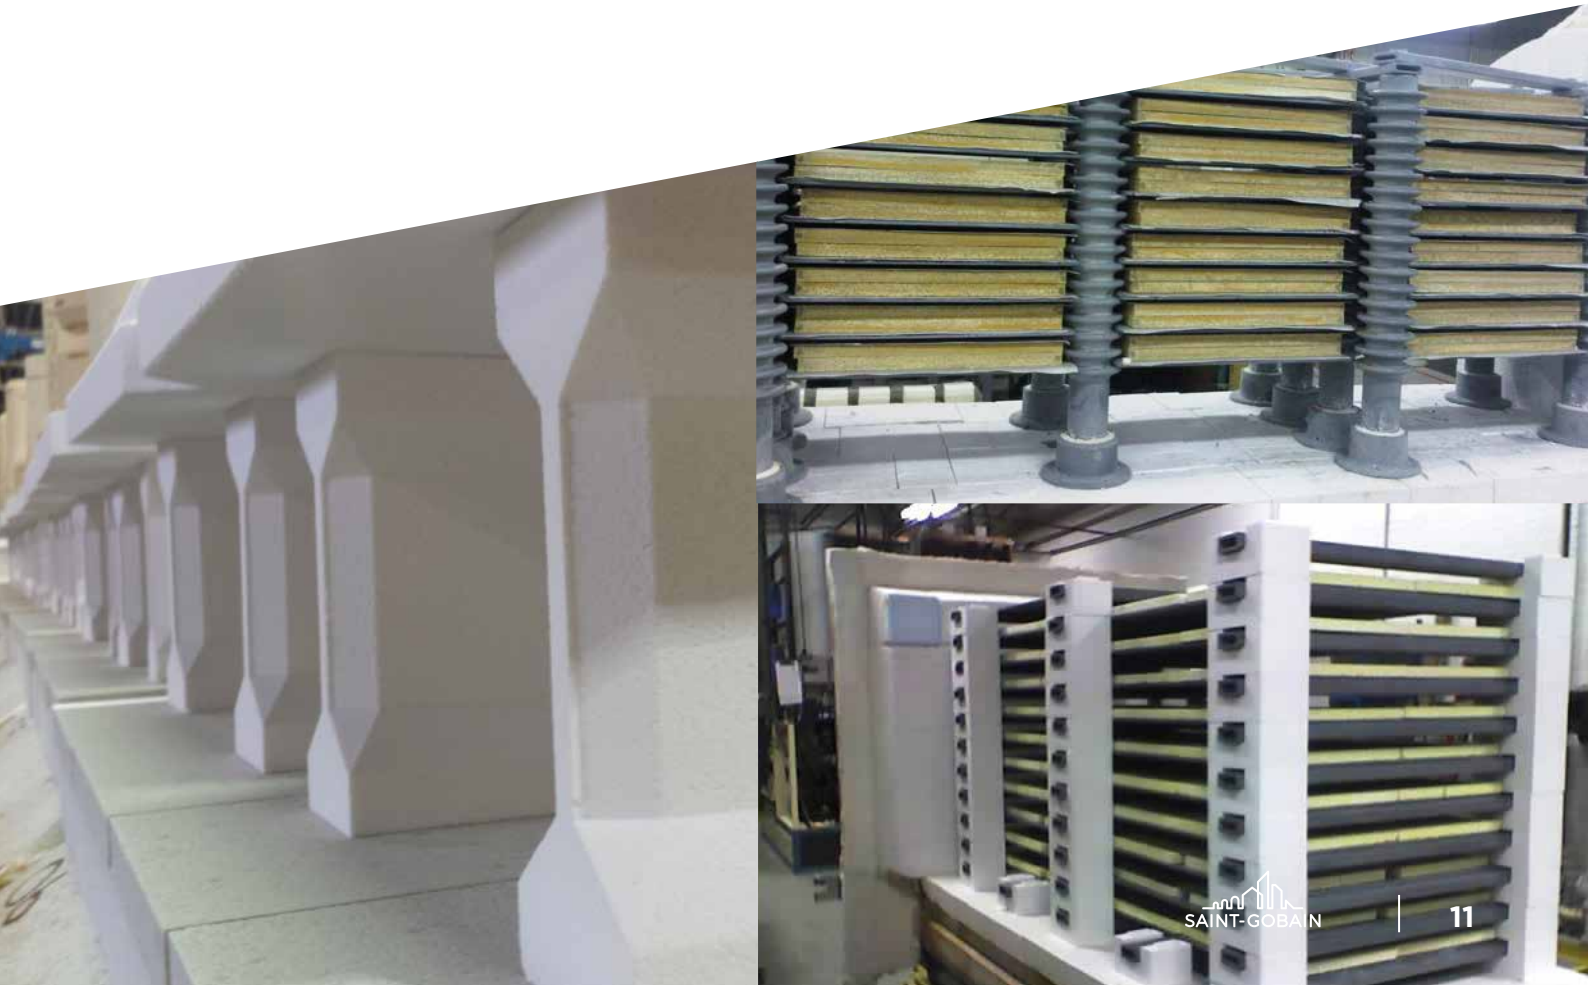

## HIGH TEMPERATURE APPLICATIONS



Complex shape capacity reduces costs & set-up time

# THE ALUMINA ADVANTAGE

Saint-Gobain Performance Ceramics & Refractories high-purity ALUNDUM® and ALFRAX® furnace refractory systems provide stable, long-lasting performance in hydrogen atmosphere furnaces and gas-fired periodic kilns.

Our high-purity alumina formulations remain stable in the driest high-temperature furnaces, operating between 1,205°C - 1,870°C (2,200°F - 3,400°F).

## BENEFITS HIGH PURITY ALUMINA



High strength dense alumina mixes\*



Minimize contamination & degradation



Provide longlasting, durable, stable linings

## MUFFLES

ALUNDUM® • ALFRAX® • AL100



High purity alumina muffles are used to control firing conditions and to provide a stable, wear resistant support medium for resistance heated atmosphere pusher furnaces at temperatures up to 1,870°C (3,400°F).

- Designed to accommodate pusher plates
- Customized dimensions available

## BRICKS

ALUNDUM® • ALFRAX® 101 • AL100 • RI34




Bricks can be safely used as part of a furnace lining up to 1,760°C (3,168°F). We also produce insulating and dense zirconia bricks for furnaces that operate up to 2,200°C (4,000°F)

- Brick shapes that support heavy loads
- Industry standard and specialty shaped brick available

## HEARTH PLATES

ALUNDUM® • ALFRAX® 101 • AL100

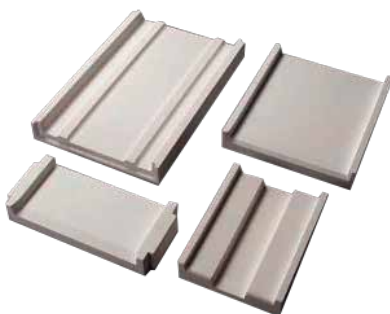

Hearth plates provide a long lasting, wear resistant push surface at temperatures up to 1,870°C (3,400°F).

- Excellent creep and sag resistance
- For maximum plate life it is important that hearth plates are properly supported





# KILN FURNITURE

ADVANCER® • ALUNDUM® • ALFRAX®  
ANNAMULLIT® CRYSTAR® • HEXOLOY®  
ZIRNORITE®

Engineered ceramics are used in the production of electronic ceramics, including alumina substrates, capacitors, ferrites, titanates, glass, quartz and crystals.

Whether nitride bonded, sintered or recrystallized silicon carbide, engineered ceramics are used in the production of semiconductor components and sputtering targets. Our complete product range extends to alumina/mullite and zirconia kiln furniture.

### Engineered Ceramics for electronic ceramics:

- Titanates
- Glass
- Quartz
- Crystals
- Ferrites
- Capacitors
- Substrates
- Insulators
- Varistors

## BENEFITS



Chemical compatibility



High stability and strength



Excellent thermal shock resistance




Outstanding thermal conductivity



High productivity



Superior size capability

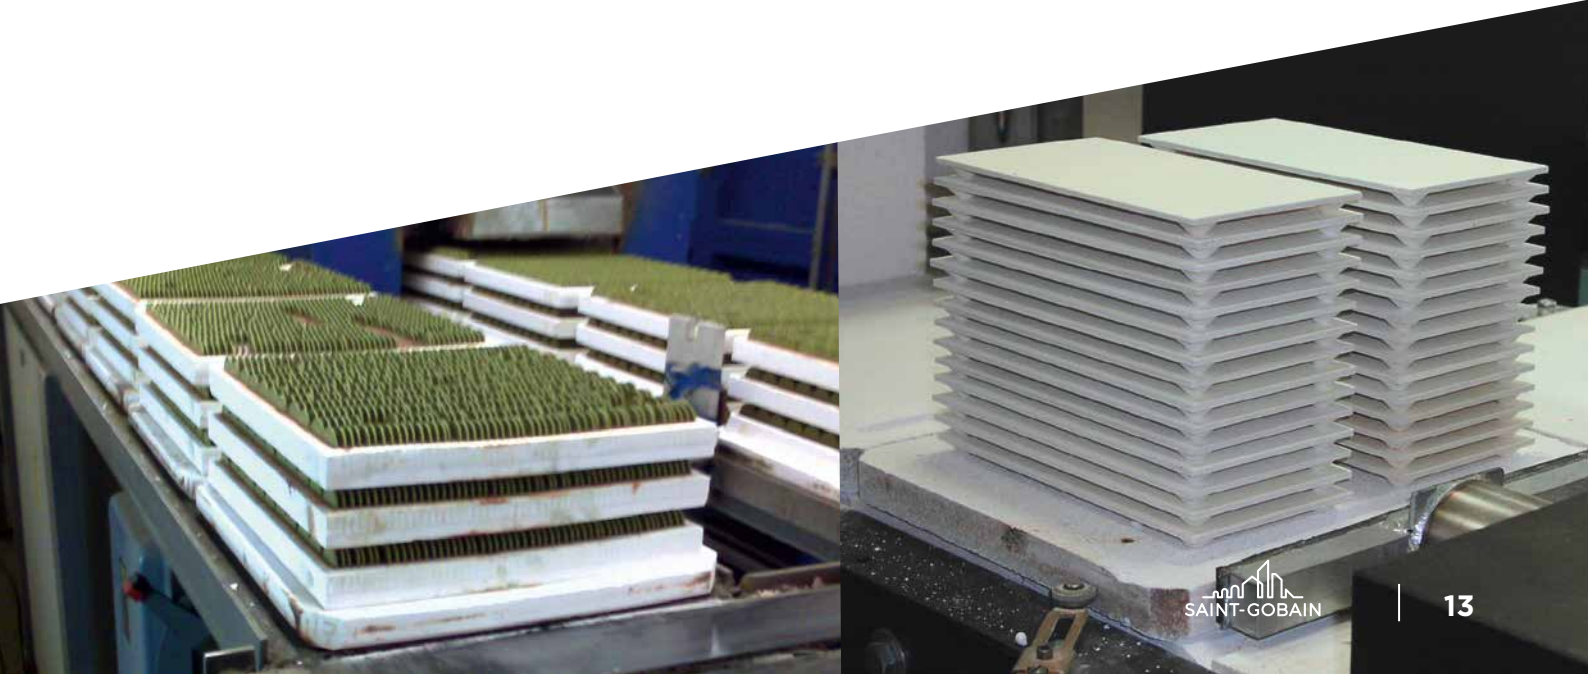





# SETTERS

ALUNDUM® • ALFRAX® • ANNAMULLIT®  
CRYSTAR® • N-DURANCE®

Our engineered ceramics are used in the production of electronic ceramics, including alumina substrates, capacitors, ferrites, titanates, glass, quartz and crystals.


- Excellent thermal shock resistance
- Shape stability and strength
- Defined flatness and surface finish

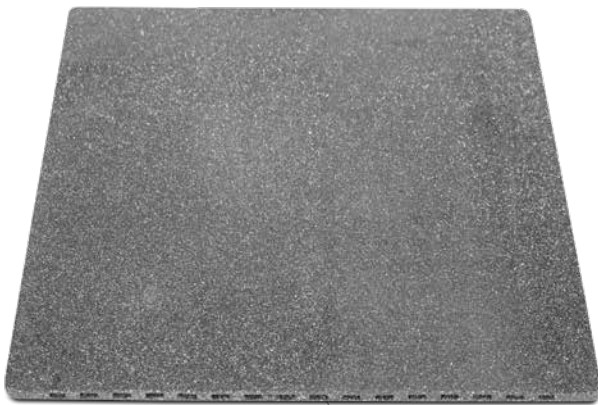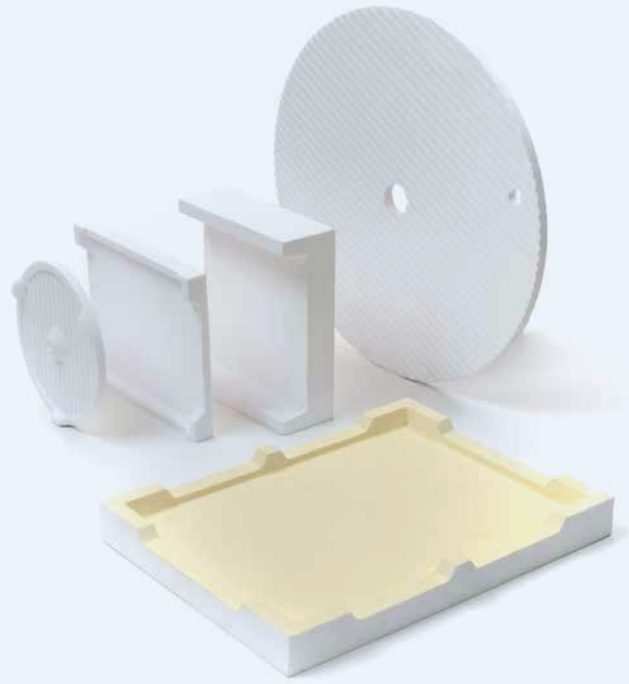

# WAFFLE SLABS

CRYSTAR®

- Porous material
- Enables stable de-binding
- Maintains high stability and strength

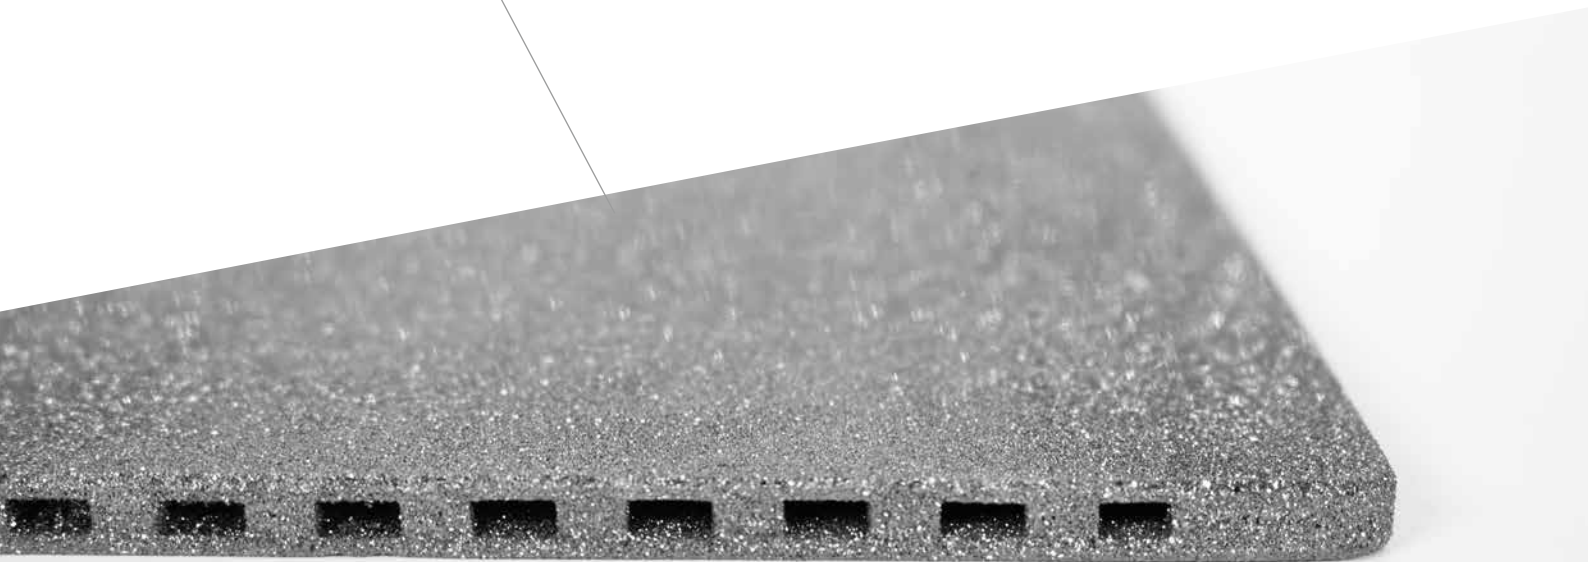



## KILN COMPONENTS

Our ability to manufacture a wide range of silicon carbide, alumina and mullite products caters to a wide spectrum of powder and pigment types and processes.

- Rollers and saggars for processing lithium-ion battery cathode powders
- Kiln furniture and refractory for processing powder metal (PM) and metal injection molded (MIM) parts in atmosphere furnaces
- Various material selections during firing process of different pigments and powder types for the best performance

## FEATURES



High stability and strength



Excellent thermal conductivity



Extended life time



Very good chemical resistance



Outstanding thermal shock resistance



## LITHIUM-ION BATTERY CATHODE ACTIVE MATERIAL PRODUCTION

## SAGGERS

ALUNDUM® • ANNACARBID® • ANNAMULLIT®  
ANNASICON® RTH • CRYSTON® • CRYSTAR®  
MULLFRAX® • MULNORITE® • N-DURANCE®  
SILIT® SKD


- Various materials and shapes available
- High temperature stability
- Defined flatness, shape stability and strength

## ROLLERS


HEXOLOY® SE • SILIT® SK

- Up to 4000 mm length and 70 mm diameter\*
- TIR down to 2.0 mm
- Customized Machining:


Outside turning




Inside turning



Hole inside



Slotted



- Outstanding chemical resistance
- Reduced maintenance requirements



\*Other dimensions on request.



## ABRASIVES & GRINDING MEDIA

# MATERIAL CHOICES

Our kiln furniture systems are designed and constructed of advanced silicon carbide (SiC) materials.

Thinner, lighter and significantly stronger than traditional kiln furniture for meeting improved energy efficiencies in high temperature applications - minimize mass while maximizing strength.

We can provide traditional SiC as well as advanced SiC with LO-MASS® kiln furniture benefits.



### GREATER KILN CAPACITY & REDUCED FIRING CYCLES

## FEATURES & BENEFITS

### TRADITIONAL SiC



High shape stability and creep resistance



Very good thermal conductivity



Excellent thermal shock resistance



High oxidation resistance

### ADVANCED SiC LO-MASS®



Reduced energy consumption



Optimum rate of capacity utilization



High flexibility



Excellent product quality




Very good thermal shock behavior

## PLATES /BATTS

ALUNDUM® • ANNAMULLIT® • CRYSTON®  
CN790 • CARBOFRAX® A • CRYSTAR®  
REFRAX® • SILIT® SK • SILIT® SKD  
N-DURANCE® • HEXOLOY® SE

Saint-Gobain offers a wide range of sizes for plates or batts. To find the best solution for your system, please speak to our experienced engineers. They understand your needs and will help you make the right product selection for your application.

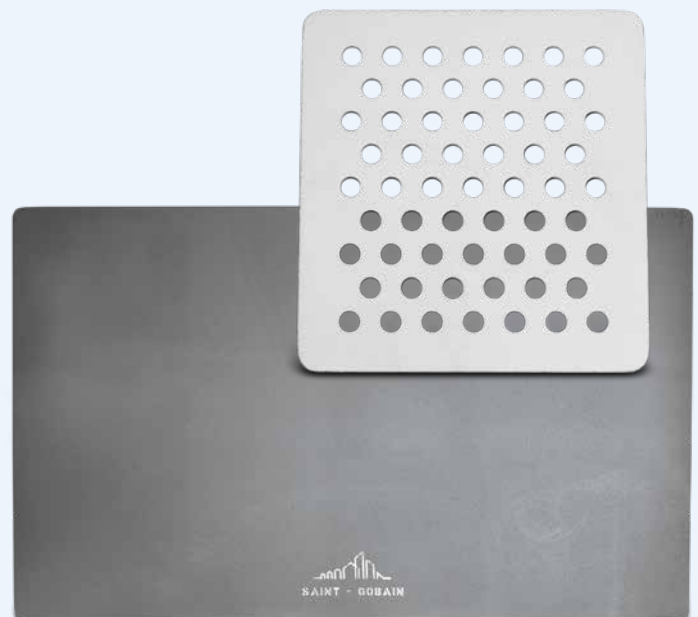





# ENGINEERED CERAMICS

Horizontal tempering of large glass plates for flat screens or glass ceramic cooktops. For roller hearth kilns, high temperature zones are predominantly equipped with silicon carbide rollers.

Co-development of innovative muffles that have steadily increased the size and quality of LCD display glass.

## BENEFITS



Excellent thermal conductivity




High strength and shape stability



No deformation over the whole temperature range



Outstanding temperature stability

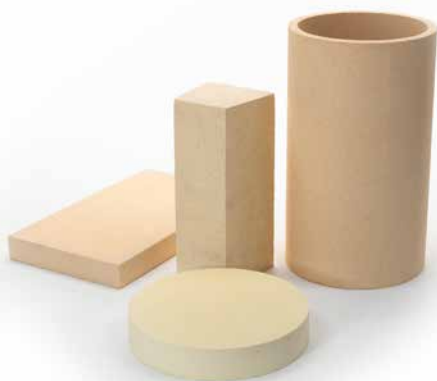

# ZIRCONIA PRODUCTS

## ZIRNORITE®

- Calcia and yttria stabilized zirconia brick and shapes
- Dense and insulating
- For extreme high temperature applications

# ROLLERS

SILIT® SK • SILIT® SKD • N-DURANCE®  
CRYSTAR® • HEXOLOY® SE

- Shape stability
- Long lengths, different diameters available
- Tight tolerances in MD and TIR



## VALUE PROPOSITION

### TAILOR-MADE MATERIALS & SOLUTIONS

# HIGH PERFORMANCE REFRACTORIES

Saint-Gobain Performance Ceramics & Refractories has been designing and manufacturing high performance ceramics & refractories for over 70 years. Our team of application engineers, material scientists and design engineers understand the conditions in atmosphere furnaces and can help you choose the correct material for your application.

### BENEFIT FROM THESE ADVANTAGES:

Custom engineering to customer specifications

Robust export compliance

Consistently high-quality manufacturing

Manufacturing locations on multiple continents

Extensive worldwide capacity

Global R&D resources

## OUR SERVICES



### INNOVATION

Research & development teams stationed at our cutting-edge R&D centers in Europe, North America, and Asia are using the most advanced and multidisciplinary technologies.



### DESIGN & ENGINEERING

Customized solutions including unique ceramic drawings, informed design modification, and modeling capabilities to minimize maintenance and improve productivity.



### PARTNERSHIP

Experienced application teams offer in-person assessments, working in partnership with customers to explore the material science and shape capability offered by a world-leading industrial ceramic manufacturer.



### CUSTOMER SUPPORT

Experienced, dedicated teams work closely with customers, either in person or remotely via the most advanced digital platforms.

# MAKING THE WORLD A BETTER HOME

## OUR COMMITMENT

BEING CARBON  
FREE BY 2050

## OUR AMBITION

To provide solutions to our customers that contribute to de-carbonization and reduce environmental footprint.

## SUSTAINABILITY AT THE HEART OF OUR BUSINESS STRATEGY

Sustainability is a key tenet of modern environmental, social, and corporate governance (ESG). At Saint-Gobain Performance Ceramics and Refractories, our business model directly contributes to critical ESG outcomes with a dual approach to sustainable development goals: Minimizing our environmental footprint while maximizing our virtuous impact across the entire value chain.

## OUR 2030 OBJECTIVES



### WATER

- **50%** Industrial water withdrawal
- 0 water discharge in area with extremely high water risk



### CO2 EMISSIONS

- **33%** reduction in scope 1 and scope 2 emissions
- **16%** reduction in scope 3 emissions



### CIRCULAR ECONOMY

- **80%** non valorized production residue
- + **30%** avoidance of virgin raw material
- 100%** recyclable packaging with 30% recycled or bio-sourced content



### PRODUCT STEWARDSHIP

- 100%** Life Cycle Analysis for all of Group product ranges

PIONEERING CERAMIC SOLUTIONS FOR EXTREME INDUSTRIAL APPLICATIONS AND A GREENER WORLD.

## MATERIAL PROPERTIES

# TYPICAL VALUES

### ALUMINA BASED

Properties	Unit	Alundum®				
		AH191A	AH199B	AH291	AH299A	AN599B
Alumina	%	91.3	99.55	91.3	99.55	99.8
Silica	%	8.5	0.07	8.5	0.07	0.05
Max. service temperature <sup>1)</sup>	°C	1750	1870	1750	1870	1760
Bulk density	g/cc	2.9	3.25	2.9	3.2	1.6
Apparent porosity	Vol. %	20	18	20	19	56
Modulus of rupture 1250°C	MPa	11.03	17.93	8.96	12.41	0.31
Modulus of Elasticity RT <sup>2)</sup>	GPa	34	117	30	135	22
Thermal Conductivity 1200°C	W/(mK)	2.85	4.3	2.6	2.3	1.45
Thermal expansion $\alpha_{RT...1100°C}$	10 <sup>-6</sup> /K	7	8.4	7	8.4	8.7

Properties	Unit	Alundex®		Alfrac® B201	AnnaMullit®		Mulnorite® KN 176	Mullfrac® EM 27
		AX796	AX797	AH723	83 (sagger/plate)	88 (sagger/plate)		
Alumina	%	91.2	91.2	88.4	86/84	82/82	82	90
Silica	%	8.6	8.6	11.5	13/15	17/17	-	-
Max. service temperature <sup>1)</sup>	°C	1800	1800	1815	1500	1750	1700	1750
Bulk density	g/cc	2.9	2.9	1.6	2.65/2.8	2.65/2.75	2.7	3
Apparent porosity	Vol. %	19	18	54	22/17	19/16	17	17
Modulus of rupture 1250°C	MPa	16.4	14.7	5.5	11/10 <sup>3)</sup>	10/10 <sup>3)</sup>	5 <sup>3)</sup>	8 <sup>3)</sup>
Modulus of Elasticity RT <sup>2)</sup>	GPa	16	17.8	11	36/27	36/37	34	16
Thermal Conductivity 1200°C	W/(mK)	3.22	3.41	1.36	1.6	1.7	1.6	1.7
Thermal expansion $\alpha_{RT...1100°C}$	10 <sup>-6</sup> /K	6.7	6.4	7.3	6.1	5.3	5.3	-

1) Dependent on the corresponding operation conditions 2) Ambient temperature 3) @1400°C



# TYPICAL VALUES

## SILICON CARBIDE BASED

Properties	Unit	AnnaCarbid®			AnnaSicon®	Carbofrax®	Cryston®	
		42	65	94	25	CN 764	CN790	
SiC-content	%	40	65	84	75	90	81	
Max. service temperature <sup>1)</sup>	°C	1430	1450	1500	1650	1500	1590	
Bulk density	kg/dm <sup>3</sup>	2.5	2.5	2.5	2.63	2.57	2.68	
Apparent porosity	Vol. %	20	21	17	17	9.8	13	
Modulus of rupture	RT <sup>2)</sup>	GPa	20	15	20	40	15.8	46
	1400°C	GPa	10	15	20	35	24.4 <sup>3)</sup>	41 <sup>3)</sup>
Thermal expansion $\alpha_{RT...1100°C}$	x10 <sup>-6</sup> /K	5	5	5	4.5	4.7	5.0	

Properties	Unit	AnnaSicon® RTH	Silit®		N-Durance®	Crystar®		Hexoloy®		
			SK	SKD		2000	3000	SA	SE	
SiC-content	%	70	85	85	70	> 99	> 97	> 99	>98	
Max. service temperature <sup>1)</sup>	°C	1450	1380	1380	1450	1600	1600	1750	1750	
Bulk density	kg/dm <sup>3</sup>	2.8	3	3	2.75	2.7	2.7	3.07	3.05	
Apparent porosity	Vol. %	< 1	0	0	≤ 1	15	15	< 0.6	5.1	
Modulus of rupture	RT <sup>2)</sup>	GPa	160	260	260	170 – 180	80	80	380	280
	1400°C	GPa	180	260	260	170 – 190	90	90	370	270
Thermal expansion $\alpha_{RT...1100°C}$	x10 <sup>-6</sup> /K	4.4	4.5	4.5	4.4	4.8	4.8	4.02	4.02	

## ZIRCONIA BASED

Properties	Unit	Zirnorite®				
		ZH192	ZH292A	ZS699	ZS730	
ZrO <sub>2</sub> -content	%	92.66	92.66	85.55 <sup>4)</sup>	85.55 <sup>4)</sup>	
Y <sub>2</sub> O <sub>3</sub> -content	%	-	-	14.00	14.00	
CaO-content	%	4.53	4.53	0.10	0.10	
Max. service temperature <sup>1)</sup>	°C	2200	1650	2500	2500	
Bulk density	kg/dm <sup>3</sup>	4.43	3.82	4.70	4.73	
Apparent porosity	Vol. %	22	32	21	21	
Modulus of rupture	RT <sup>2)</sup>	GPa	12.02	9.80	17.78	27.89
	1450°C	GPa	0.57	1.25	12.56 <sup>5)</sup>	10.99
Thermal expansion $\alpha_{RT...1100°C}$	x10 <sup>-6</sup> /K	9.10	9.10	10.60	10.60	

1) Dependent on the corresponding operation conditions 2) Ambient temperature 3) @1450°C 4) ZrO<sub>2</sub> + HfO<sub>2</sub>-content 5) @1250°C

## DIMENSIONS

# STANDARD DIMENSIONS FOR BEAMS

Below listed dimensions cover the majority of standard sizes. Larger sizes and tighter tolerances on request.

Feasible dimensions and tolerances of **SILIT® SK** beams\*:

Dimensions		Tolerance X mm	Wall Thickness s +1/-0.5 mm	Max Length ± 2 mm
Height H ± X mm	Width B ± X mm			
20	20	± 1.0	6	2000
25	25	± 1.0	6	2000
30	20	± 1.0	6	2000
30	30	± 1.0	6	2000
35	35	± 1.0	6	2000
40	20	± 1.0	6	2000
40	25	± 1.0	6	2000
40	30	± 1.0	6	3000
40	40	± 1.0	6	3500
50	30	± 1.0	6	3500
50	40	± 1.0	6,3	3500
50	50	± 1.0	6,3	3500
60	40	± 1.2	6,8	3500
60	50	± 1.2	6,8	3500
60	60	± 1.2	7,3	3500
70	40	± 1.4	7,5	3500
70	50	± 1.4	7,5	3500
70	60	± 1.4	7,5	3500
80	40	± 1.4	8	3500
80	60	± 1.4	8,5	3500
80	80	± 1.4	9	3500

Maximum deflection MD and side deflection SD of **SILIT® SK** beams:

Length [mm]	MD [mm]	SD [mm]
≤ 2000	≤ 2	≤ 3
≤ 2500	≤ 3	≤ 5
≤ 3000	≤ 5	≤ 8
≤ 3650	≤ 7	≤ 9

Maximum deflection MD of **HEXOLOY® SE** tubes:

Cross Section			
Size (mm)	Tolerances	Size (inch)	Tolerances
14 x 14	± 0.8	.551" x .551"	± 0.031
17.78 x 17.78	± 0.8	.70" x .70"	± 0.030
25.4 x 25.4	± 0.8	1" x 1"	± 0.030
31.75 x 31.75	± 0.8	1-1/4" x 1-1/4"	± 0.030
38.1 x 38.1	± 0.8	1-1/2" x 1-1/2"	± 0.030
50.8 x 50.8	± 2.5	2" x 2"	± 0.100

Feasible dimensions and tolerances of

**N-Durance® beams\***:

Dimensions		Wall Thickness s +3/-0.5 mm	Max Length ± 2 mm
Height H ± 1.5 mm	Width B ± 1.5 mm		
20	20	4	1300
30-40	20-30	5	2000
40-80	40-50	6	3200
80-110	50-80	7	3200

Maximum deflection in relation to the length is 2‰.

Feasible dimensions and tolerances of

**CRYSTAR® beams\***:

Dimensions		Wall Thickness s +3/-0.5 mm	Max Length ± 2 mm
Height H ± 1.5 mm	Width B ± 1.5 mm		
20	20	4	2000
20-40	20-30	5	2000
40-80	30-50	6	2000
80-110	40-60	8	3000
110-270	40-80	10 +5/-0.5	3000

Maximum deflection in relation to the length is 2‰.

# STANDARD DIMENSIONS FOR TUBES & ROLLERS

Below listed dimensions cover the majority of standard sizes. Larger sizes and tighter tolerances on request.

Feasible dimensions and tolerances of **SILIT® SK** tubes & rollers\*

Diameter				Max Length ± 2 mm
Outside D [mm]		Inside d [mm]		
20	± 0.3	11	+0.35/-1.55	2500
20	± 0.3	13	+0.35/-1.55	2500
25	± 0.3	15	+0.4/-1.6	2500
25	± 0.3	18	+0.4/-1.6	2500
30	± 0.4	21	+0.45/-1.65	3000
31.7	± 0.4	22.5	+0.5/-1.7	3000
34	± 0.4	24	+0.5/-1.7	3500
35.5	± 0.5	25	+0.5/-1.7	3500
38.1	± 0.5	27.8	+0.55/-1.75	3500
40	± 0.5	30	+0.55/-1.75	3500
42	± 0.5	32	+0.55/-1.75	3500
45	± 0.6	34	+0.7/-1.8	3500
50.8	± 0.6	38.1	+0.65/-1.85	3500
55	± 0.9	43	+0.7/-1.9	3500
60	± 1.0	47	+0.8/-2	3500
63.5	± 1.2	50.8	+0.9/-2.1	3500
65	± 1.2	52	+0.9/-2.1	3500
70	± 1.2	56	+1/-2.2	3000
76	± 1.4	60	+1/-2.2	3000
80	± 1.4	65	+1.2/-2.4	3000
90	± 1.6	76	+1.4/-2.6	3000

Maximum deflection MD of **SILIT® SK** tubes & rollers:

Length [mm]	MD [mm]
≤ 2000	≤ 5
≤ 3500	≤ 7
> 3500	≤ 3 ‰

Maximum deflection MD and side deflection SD of **HEXOLOY® SE** beams:

Custom Lengths-L (+/- 1/8")	OD	ID	Tolerances
6"- 27" >27"- 54"	3/8"	1/4"	± 0.015
	1/2"	.380"	± 0.063
	14mm	11mm	± 1.6mm
	5/8"	3/8"	± 0.025
	3/4"	.570	± 0.063
	3/4"	1/2"	± 0.025
	1"	1/2"	± 0.03
	1-1/4"	3/4"	± 0.04
	1-1/4"	0.922	± 0.04
	1-1/2"	1"	± 0.04

Feasible dimensions and tolerances of **N-Durance®** tubes & rollers\*:

	Outer Diameter [mm]	Wall Thickness [mm]	Max Length [mm]
	-20	4	1000
	21-30	5	2500
	31-40	5	2800
	41-50	5	3000
	51-100	6	3000
Tolerance	-2	-6	±2

Maximum deflection MD of **N-Durance®** tubes & rollers:

Length [mm]	MD [mm]
≤ 2000	≤ 5
2001-3000	≤ 7

Feasible dimensions and tolerances of **CRYSTAR®** tubes & rollers\*:


	Outer Diameter [mm]	Wall Thickness [mm]	Max Length [mm]
	-20	4	1000
	21-30	5	2500
	31-40	5	2800
	41-50	5	3000
	51-60	6	3000
	61-70	6	3000
	71-80	6	3000
	81-90	6	3000
	91-100	6	3000
Tolerance	+1/-0,5	+3/-0,5	±2

Maximum deflection MD of **CRYSTAR®** tubes & rollers:

Length [mm]	MD [mm]
≤ 2000	≤ 5
2001-3000	≤ 7

\*Technical data, right of modification reserved.

# OUR GLOBAL PRESENCE

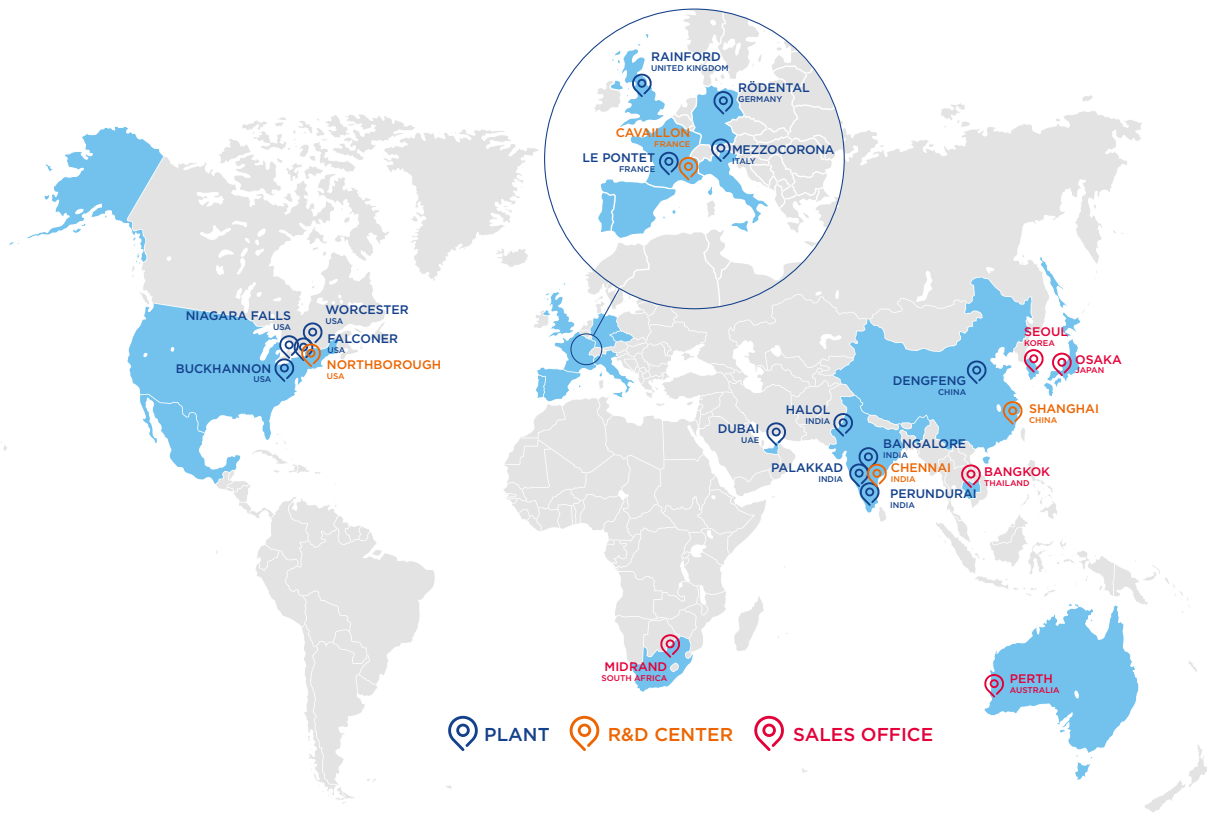

## CONTACT US

### USA

Niagara Falls  
+1 716 278 6233  
Worcester  
+1 508 795 5264  
Falconer  
+1 716 483 7222

### MIDDLE EAST & AFRICA

Dubai (UAE)  
+971 4 8011800

### EUROPE

Rainford (United Kindom)  
+44 1744 882 941  
Rödental (Germany)  
+49 9563 724 201

### INDIA

Bangalore  
+ 91 7228 950 887  
Halol  
+ 91 7228 950 886

### PACIFIC

Perth (Australia)  
+61 394 745 940

### JAPAN

Osaka  
+81 6 4707 1700

### CHINA

Dengfeng  
+86 4008880198  
Shanghai  
+86 4008880198

### ASIA

Seoul (Korea)  
+82 2370 693 34  
Bangkok (Thailand)  
+66 61 415 9204

For more information:  
[www.ceramicsrefractories.saint-gobain.com](http://www.ceramicsrefractories.saint-gobain.com)  
[ceramics.refractories@saint-gobain.com](mailto:ceramics.refractories@saint-gobain.com)

Follow us on



The information contained in this document is believed to be accurate and reliable but is provided without guarantee or warranty on the part of Saint-Gobain Performance Ceramics & Refractories. Process parameters and requirements can impact typical values and test methods. Further, nothing present herein should be interpreted as an authorization or inducement to practice any patented invention without an appropriate license. Saint-Gobain Performance Ceramics & Refractories Terms and Conditions apply to all purchases.

Copyright © 2024, Saint-Gobain Performance Ceramics & Refractories. All rights reserved.

