

Inlet


Permeate over filtration cycle

### Feed Characteristics

- Non-centrifuged beer
- Turbidity: 500 EBC
- Temperature: 2°C (40°F)

### Result Summary

- Permeate flux: 50 – 100 LMH
- Permeate turbidity < 2 EBC
- LRV yeast > 4
- No lactic bacteria detected in filtrate
- Straightforward CIP recovery

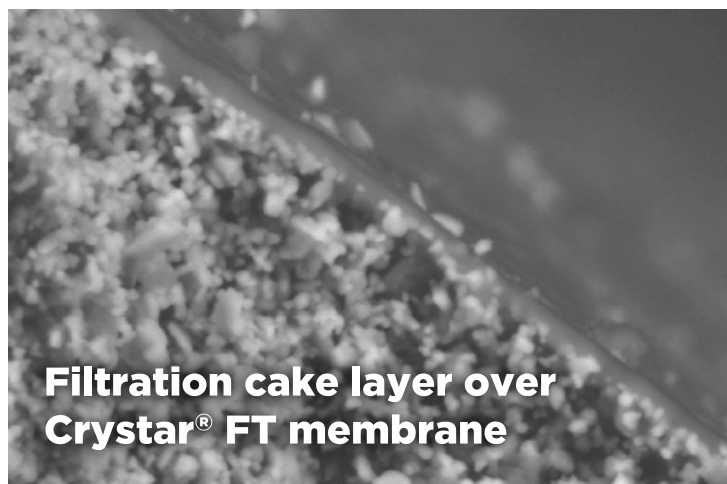

Filtration cake layer over  
Crystar® FT membrane

0005

x5,0k 20 µm

For more info visit: [www.crystarfiltration.saint-gobain.com](http://www.crystarfiltration.saint-gobain.com)  
Or email: [crystarft@saint-gobain.com](mailto:crystarft@saint-gobain.com)

The information contained in this document is believed to be accurate and reliable but is provided without guarantee or warranty on the part of Saint-Gobain IndustrieKeramik Rödental GmbH. Process parameters and requirements can impact typical values and test methods. Further, nothing present herein should be interpreted as an authorization or inducement to practice any patented invention without an appropriate license. Saint-Gobain IndustrieKeramik Rödental GmbH Terms and Conditions apply to all purchases.

### Challenges in beer clarification:

Beer clarification is a crucial yet difficult stage of the brewing process, due to the complexity and high organic load of the product. Traditional Kieselguhr filtration has been raising environmental concerns and polymeric and ceramic oxide membranes show operational limitations.

### Objective Crystar® microfiltration:

Provide a high productivity and cost-effective solution to reduce haze in the finished beer in order to ensure its visual quality and contribute to its stability.

### Products recommended:

- Any Crystar® FT crossflow geometry
- Pore size: 250 nm or 600 nm

### Main benefits of Crystar® FT:

- High permeate flux
- Excellent permeate quality
- No need for beer pretreatment
- Short and efficient clean-in-place procedures with low water usage.

