


MINIMUM COMPONENTS - ONLY 4 PARTS TO THE SYSTEM

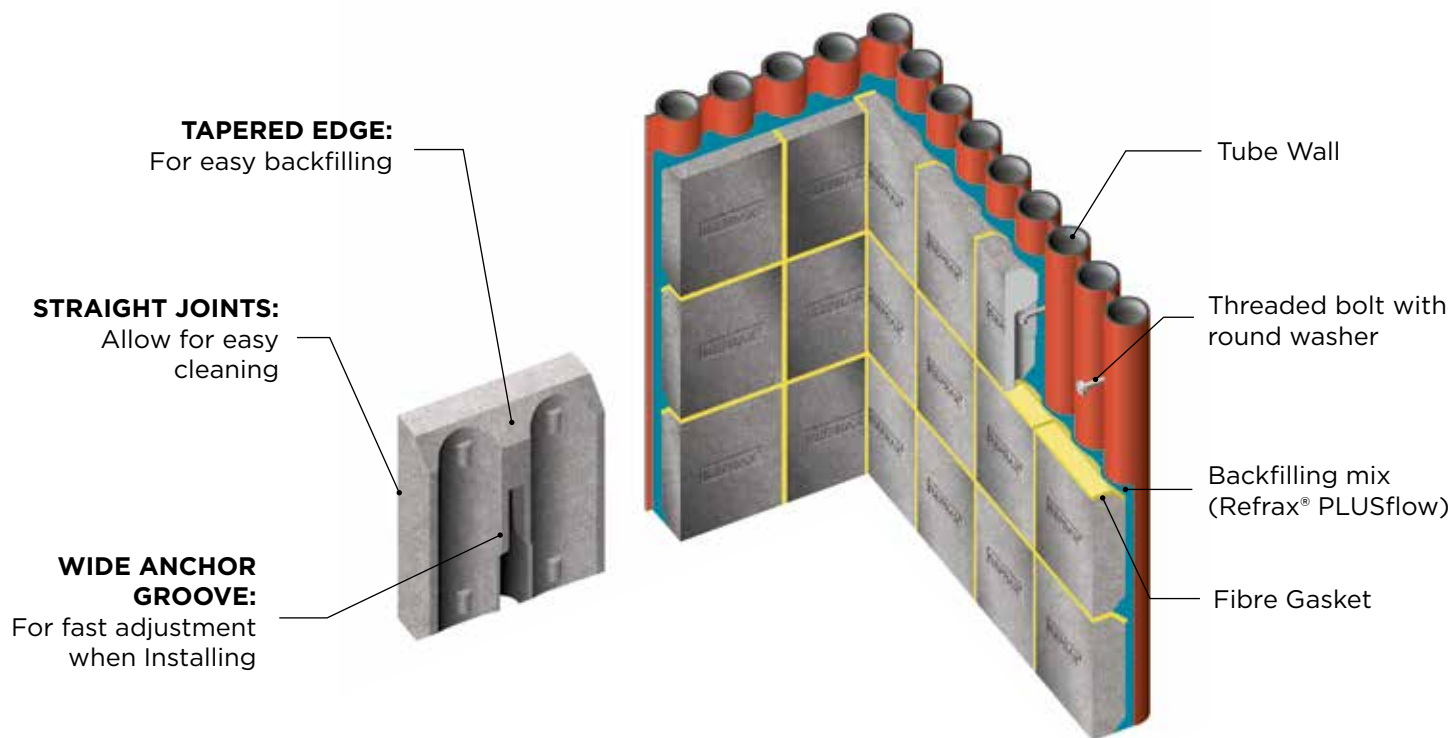

AVAILABLE IN:

REFRAX® PRO

REFRAX® PLUS

REFRAX® TOP

Discuss with our engineers for the optimum material to exceed expectations.

Quick and simple installation

- Thanks to the simple & fast self leveling Refrax® PLUSflow plus tapered top edge
- Due to high flexibility for bolt welding with the wide anchor groove
- Only 1 anchor per tile = super fast placement
- With adjustable distance to the tube wall because of threaded anchor/washer
- Thanks to the pre-cut fibre gaskets supplied, ready to directly install.

Applications

Suitable in all situations, for vertical walls, e.g. side, back and front PLUS inclined roof tube walls, like inlet ceiling, burn out and boiler ceilings.

Access to datasheets



For more information: www.ceramics.refractories.saint-gobain.com

The information contained in this document is believed to be accurate and reliable but is provided without guarantee or warranty on the part of Saint-Gobain IndustrieKeramik Rödental GmbH. Process parameters and requirements can impact typical values and test methods. Further, nothing present herein should be interpreted as an authorization or inducement to practice any patented invention without an appropriate license. Saint-Gobain IndustrieKeramik Rödental GmbH Terms and Conditions apply to all purchases.

SAINT-GOBAIN

Mill Lane, Rainford,
St. Helens WA11 8LP
United Kingdom
PHONE: +44 (0) 1744 88 2941
MOBILE: +44 (0)7753 969493

PERFORMANCE CERAMICS & REFRACTORIES