



SAINT-GOBAIN PERFORMANCE CERAMICS & REFRACTORIES

WEAR RESISTANT TECHNOLOGIES



PERFORMANCE CERAMICS & REFRACTORIES

Saint-Gobain Performance Ceramics & Refractories leads the industry in design, development and production of engineered ceramics and refractory products for extreme operating conditions and high temperature applications. Every product and material is designed to maximize performance and durability while minimizing environmental impact.

We strive to deliver value through our global technical expertise in material science, manufacturing technology, design engineering and the long-term partnerships we form with our customers. Our employees are committed to delivering the best solutions and services to meet the unique material and engineering needs of our customers.

Our ability to deliver custom-made solutions for every application is further enhanced by our R&D centres, manufacturing plants, sales and application engineering specialists who are positioned strategically across the globe.

TOGETHER, WE MAKE THE MATERIAL DIFFERENCE.

SAINT-GOBAIN
TODAY
TOP 100
GLOBAL INNOVATORS



1 product
out of **4**
sold by Saint-Gobain today
didn't exist 5 years ago


3700
Researchers

Present in
68
countries

Nearly
400
patents filed in 2019

One of the top
100
industrial groups
in the world

2019 turnover
€42.6
Billion

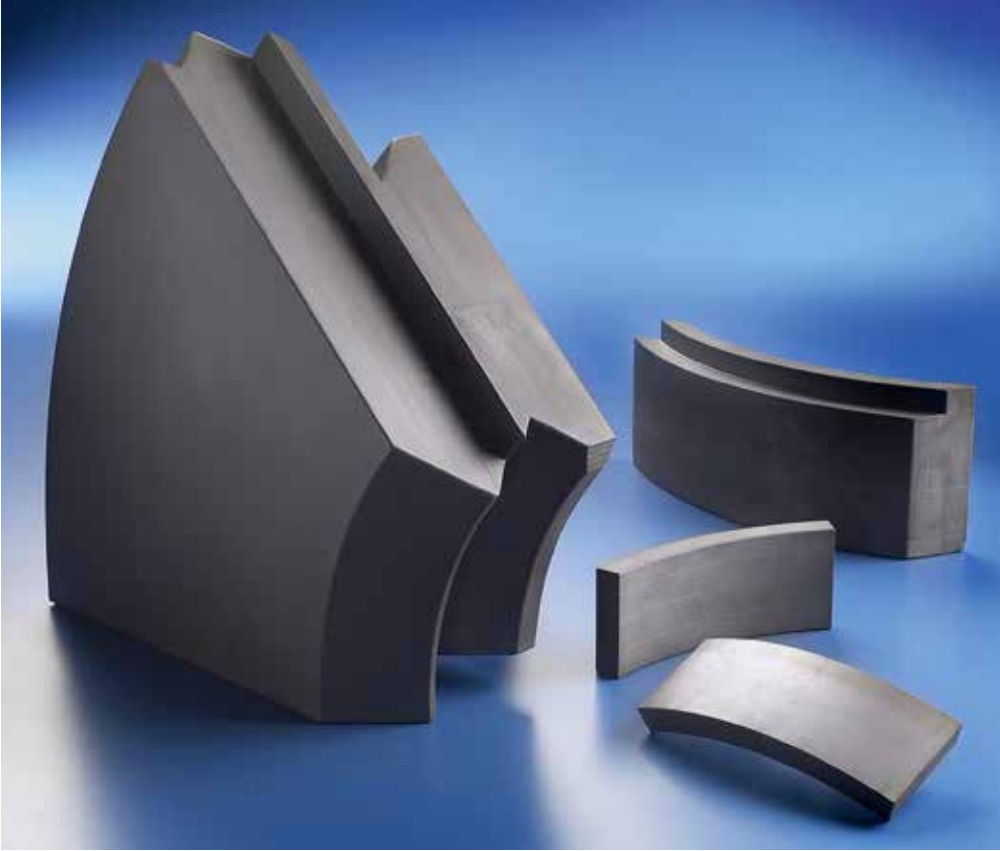

WEAR RESISTANT TECHNOLOGIES

Saint-Gobain's Wear Resistant products and solutions are developed with a focus to serve applications across various markets that need resistance to types of wear.

Our expertise in material science combined with in-depth knowledge of application, design, manufacturing engineering and installation expertise enables us to offer customized ceramic material solutions for various applications across a multitude of industries.

The applications we support are relevant across a wide range of industries. A few of them are listed below.

KEY MARKETS

 MINING & MINERAL PROCESSING

 POWDER & BULK SOLIDS

 AGGREGATES

 IRON MAKING

 GRAIN HANDLING

 ASPHALT

 CHEMICAL PROCESSING


 CEMENT

 PULP & PAPER

 COAL FIRED POWER

 RECYCLING

 ENVIRONMENT

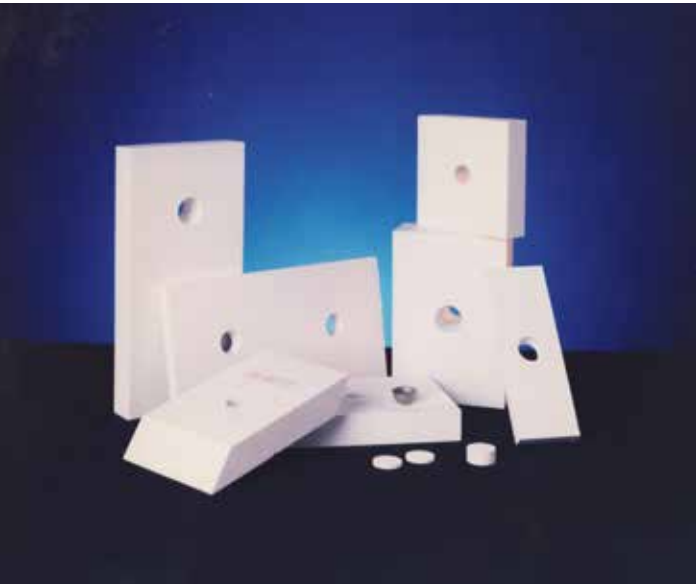

ULTRA FINE SINTERED ALPHA-ALUMINA OXIDE (Al_2O_3)

Ultra fine-grain, sintered high grade pressed alumina for various types of abrasion.

DURAFRAX®

- versatile material suitable for a range of applications
- most cost effective wear resistant material
- FDA approved for grain & food processing



NITRIDE BONDED SILICON CARBIDE (NBSiC)

High performance dense NBSiC ceramic refractory with complex shapes' capabilities.

CRYSTON® (MAX. 1590°C) & CAST REFRAZ® (MAX. 1450°C) - CAST

- good wear-resistant cast material
- large and complex shape capabilities
- good thermal shock resistance

CRYSTON® TW - CAST

- improved wear and thermal shock resistance over a standard NBSiC
- thin wall components



REFRAZ® 20 - PRESSED

- good wear-resistant pressed material
- improved oxidation and thermal shock resistance due to higher porosity
- capable of tighter tolerances due to pressed forms
- lower price than Cast SiCs

REACTION BONDED SILICON CARBIDE (RBSiC / SiSiC)

Premium cast silicon carbide material provides excellent wear resistance and is engineered to resist oxidation and thermal shock.

NORFRAX® RB (MAX. 1350°C) & SILIT® SKD (MAX. 1380°C)

- better wear resistant cast material
- good chemical resistance to molten salts (Na⁺), Chlorine, Sulphur and Nitrogen Oxides
- large and complex shape capabilities

HAMMERFRAX®


A patented product, it is an ultra-premium silicon carbide material engineered to resist abrasion and mechanical shock.

- best wear resistance over other standard SiSiCs
- large and complex shapes with exceptional dimensional accuracy

HEXOLOY®

Premium sintered alpha silicon carbide pressed or extruded to customizable complex shapes providing maximum performance.

- superior resistance to wear, corrosion and oxidation
- extreme hardness and mechanical resistance
- excellent resistance to thermal shock
- customized complex and intricate shapes
- maximum use temperature 1900°C

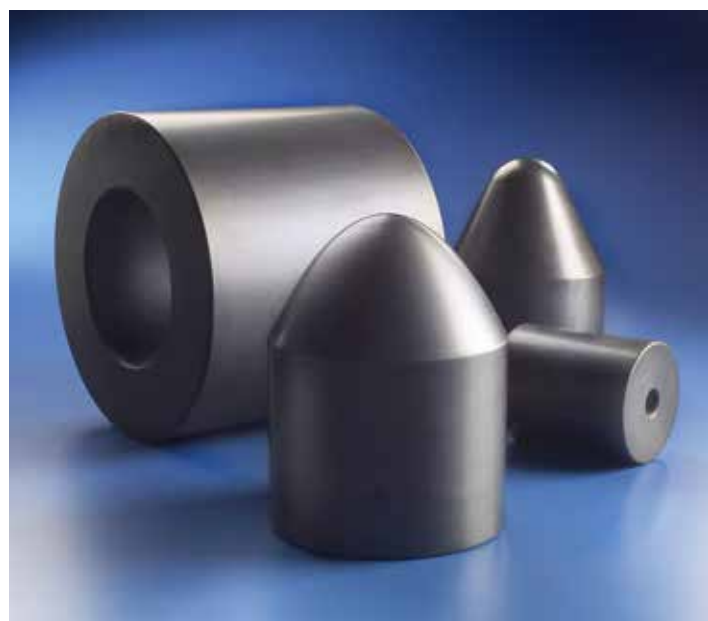



ALUMINA ZIRCONIA SILICA (AZS)

Fused cast product with its interlocking crystalline structure, provides resistance to heavy impact, sliding abrasive wear and thermal shock.

ZAC / CORGUARD®

- highest impact resistant material with exceptional abrasion resistance, edge and fracture toughness
- interlocking grains and impervious structure provides high corrosion resistance to acid and acid bases
- largest shape capability in our portfolio



CASTABLES

Silicon carbide and alumina based trowelable, wearing compounds are used to provide abrasion resistance in low and high temperature applications where traditional refractory bricks are either not feasible or cost effective.

CARBOFRAX® 50CK & ALFRAX® 50CK

- easy preparation and installation
- no curing spray needed after installation
- 24 hour ambient temperature cure
- designed to withstand thermal shock
- higher temperature resistant products available

ACCESSORIES




WEARPAK®

Adhesives, Mortar and Wearing compounds offered in various viscosity/grades to suit every application need.



WEARFIX®

A ZAC ceramic based wearing compound used to improve joint wear or as a filling material for improved performance.



DIAMOND SAW BLADES

Designed for easy on site jobs, offered in 8", 10", 14" and 20" dia.



DIAMOND FLAP DISCS

Diamond impregnated discs for fast removal, chamfering edges or smoothing surfaces wet or dry.

OVERVIEW




	Aluminum Oxide (Al ₂ O ₃)	Silicon Carbide (SiC)					
	Alpha Al ₂ O ₃	Nitride Bonded SiC				Reaction Bonded SiC	
	Durafrax®	Cryston®	Cryston® TW	Cast Refrax® 20	Refrax® 20	Norfrax® RB	Silit® SKD
Properties							
Density, g/cm ³	3.52	2.77	2.77	2.77	2.62	3.05	3.00
Porosity, %	0	8	<1	15	16	0	0
Thermal Conductivity, W/m-K	18	16.3	23.7	13.8	16.3	125	35
Thermal Expansion, x10 ⁻⁶ /°C	8.3	3.2	4.3		4.7	4.3	4.5
Vickers Hardness, Gpa	9	23	11,6			22	
Abrasion Resistance C704	1.0	1.6	1.5	1.9	2.5	0.7	0.7
Max Use Temp, °C	1250	1590	1450	1450	1590	1350	1380
Performance							
Sliding Abrasion	Better	Good	Better	Good	Good	Better	Better
Erosion	Better	Good	Good	Good	Good	Better	Better
Impact	Good	Good	Good	Good	Good	Good	Good
Corrosion Resistance	Good	Good	Good	Good	Good	Better	Better
Thermal Shock	Good	Good	Better	Good	Good	Better	Better
Thermal Insulation	Best	Best	Better	Best	Best	Good	Good
Electrical Insulation	Best	Better	Better	Better	Better	Good	Good

	Silicon Carbide (SiC)		Alumina Zirconia Silica	Castables	
	Reaction Bonded SiC	Sintered Alpha SiC	Fused Cast AZS	Silicon Carbide	Aluminum Oxide
	HAMMERfrax®	Hexoloy®	ZAC / Corguard®	Carbofrax® 50	Alfrax® 50
Properties					
Density, g/cm ³	3.04	3.10	3.49	2.45	2.80
Porosity, %	1	0	1.15		15.5
Thermal Conductivity, W/m-K		125,6			
Thermal Expansion, x10 ⁻⁶ /°C	4.3	4.02			
Vickers Hardness, Gpa	22		19.6		
Abrasion Resistance C704	0.7	0.4	1.1	7.5	6.5
Max Use Temp, °C	1350	1900	1650	500	500
Performance					
Sliding Abrasion	Best	Best	Good	Good	Good
Erosion	Better	Best	Better	Good	Good
Impact	Good	Good	Best	Good	Good
Corrosion Resistance	Better	Best	Better	Good	Good
Thermal Shock	Better	Good	Better	Good	Good
Thermal Insulation	Better	Good	Best	Better	Better
Electrical Insulation	Better	Good	Better	Better	Better

PRE-ENGINEERED CERAMIC SOLUTIONS

Saint-Gobain Performance Ceramics & Refractories offers Pre-Engineered solutions for Wear Resistant applications.

Our solutions developed with a deeper understanding of the customer's needs, tailor-made to fit accurate requirements through Research & Development, Engineering Design of shapes, Application Engineering, Installation and Analysis. These solutions are made possible with state-of-the-art manufacturing processes and techniques that enable us to produce geometries from simple to complex, thus resulting in enhancing the overall performance of wear resistance to meet every customer need.

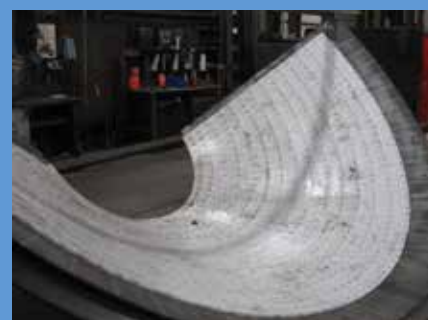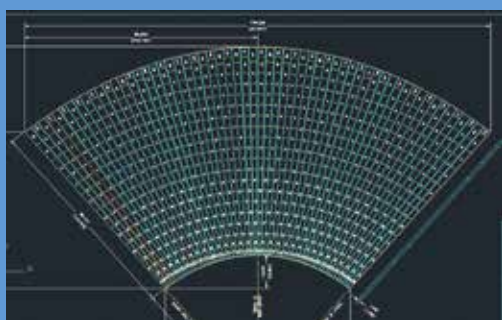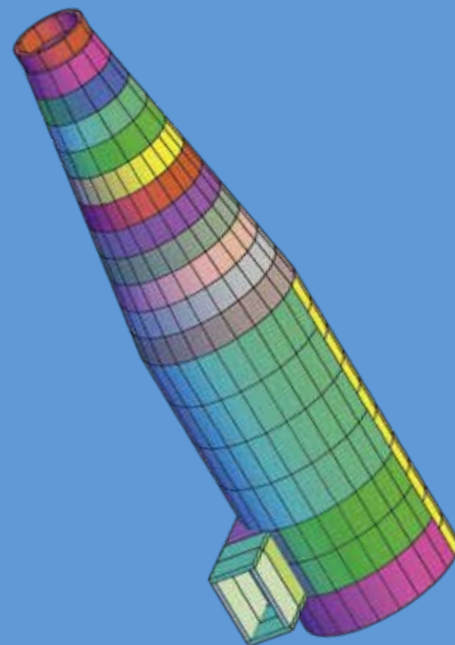

CONTACT US

NORTH AMERICA

Brian Hilk
+1 724 554 1869
brian.a.hilk@saint-gobain.com

INDIA

Subhasis Nandi
+91 (988) 003 0094
subhasis.nandi@saint-gobain.com

SOUTH AMERICA

Cristiane Cassiano
+55 1999 766 2431
cristiane.cassiano@saint-gobain.com

AUSTRALIA

Arthur Wade
+61 409 288 901
arthurwade@saint-gobain.com

EUROPE

Vladimir Gerasimov
+420 (606) 607 224
vladimir.gerasimov@saint-gobain.com

ASIA

Yuan Chen
+86 1360 1936 422
yuan.chen@saint-gobain.com

MENA

Hamzah Al Hussan
+9 7156 4014 740
hamzah.alhussan@saint-gobain.com



www.ceramicsrefractories.saint-gobain.com

Follow us:  [saint-gobain-performance-ceramics-refractories](https://www.linkedin.com/company/saint-gobain-performance-ceramics-refractories)

The information contained in this document is believed to be accurate and reliable but is provided without guarantee or warranty on the part of Saint-Gobain Performance Ceramics & Refractories. Process parameters and requirements can impact typical values and test methods. Further, nothing present herein should be interpreted as an authorization or inducement to practice any patented invention without an appropriate license. Saint-Gobain Performance Ceramics & Refractories Terms and Conditions apply to all purchases.

Copyright © 2020, Saint-Gobain Performance Ceramics & Refractories. All rights reserved.

